

MEDITEX INDUSTRIES SDN BHD

32, JALAN UTARID U5/17, BANDAR PINGGIRAN SUBANG, SEKSYEN U5, MAN SING INDUSTRIAL,
40150 SHAN ALAM, SELANGOR, MALAYSIA

The following sample(s) was / were submitted and identified on behalf of the client as:

Product Description: FR FABRIC (USED IN UPHOLSTERED FURNITURE)

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Required:

In accordance with Schedule 4 Part I and Schedule 5 Part I (BS 5852 Part I Cigarette test and Match test) of Furniture and Furnishings (Fire) (Safety) Regulations 1988 With Amendments In 1989 and 1993 of United Kingdom.

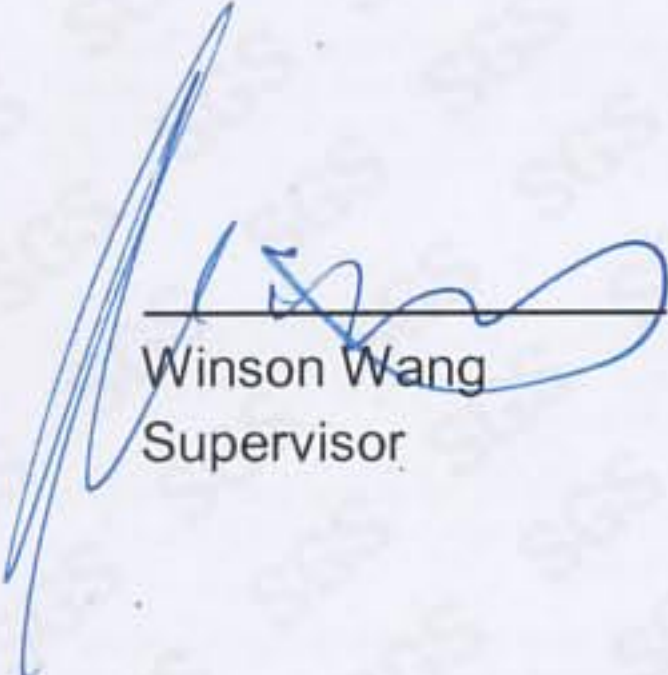
Test Results: -- See attached sheet --

Conclusion: In Our Opinion, the Submitted Sample Met the Requirements of Schedule 4 Part I and Schedule 5 Part I.

Test Duration:

Sample Receiving Date : JUN.19, 2008
Test Performing Date : JUN.19, 2008 TO JUN.24, 2008

Signed for and on behalf of
SGS-CSTC Co., Ltd.


Winson Wang
Supervisor

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The results shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 90 days. This Test Report shall not be reproduced except in full, without written approval of the Company.

Test Conducted: Based on BS 5852 Part 1: 1979

The test, specified in Schedule 4 Part I and Schedule 5 Part I of the Furniture and Furnishings (Fire) (Safety) Regulations, is based on BS 5852 part I: 1979.

To assess the ignitability of cover fabric used in upholstered components when subjected to ignition source 0 and 1.

General Information:

British Standard 5852 Part 1 :1979			
Size of test rig	Large		
Soaking condition	Clause 4.2-4.5 OF BS 5651:1978, 30 Minutes AT 40°C		
Precondition	Indoor ambient condition		72h
Conditioning of test specimen and ignition source(s)	20 ± 5°C	50 ± 20%	16h
Testing enclosure (fume cupboard /room)	15°C to 30°C	20% to 70%	---

Test Results: The following test results only to the ignitability of the combination of materials under the particular condition of test. They are not intended as a means of assessing the full potential fire hazard of the materials or products in use.

(A) Smoldering Cigarette Test Criteria	1 st test	2 nd test
① Whether the evidence of progressive smoldering or flaming is observed in the interior and/or cover	NO	NO
② Whether progressive smoldering or flaming of the sample is observed at any time within one hour of placement of the cigarette	NO	NO
③ Whether progressive smoldering is observed on final examination when dismantle assembly and examine internally	NO	NO

(B) Butane Flame Test Criteria	1 st test	2 nd test
① Whether any evidence of flaming or progressive smoldering is observed in the interior and/or cover within 120s of the removal of the burner tube	NO	NO
② Whether progressive smoldering is observed on final examination when dismantle assembly and examine internally	NO	NO

To be continued...

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf or attached. Said Conditions are also available upon request or are accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional policies defined therein. The results shown in this Test Report refer only to the sample(s) tested unless otherwise stated and such sample(s) are retained for 90 days only. This Test Report shall not be reproduced except in full, without written approval of the Company.



